

Context-Aware AI Robot for Adaptive Human Tracking in Dynamic Environments

¹Mr. Atharva Hanchate, ²Mr. Ayaan Shaikh, ³Mr. Ziya Shaikh, ⁴Mr. Haaris Mulla, ⁵Mr. Zuber Shaikh

^{1,2,3,4}Student AIML, ⁵Lecturer AIML

Anjuman-I-Islam's A. R. Kalsekar Polytechnic, New Panvel

¹atharva3hanchate@gmail.com, ²ayaan.jameel07@gmail.com ³ziyuaahmed786@gmail.com ⁴haarismulla95@gmail.com

⁵zuber.shaikh@aiarkp.ac.in

Abstract:

In this paper, we propose a context-aware artificial intelligence (AI) strategy for autonomous robotic tracking (ART) in various environments. Our system fuses a spatial-temporal (ST) mapping with a probabilistic intent detection (PID) module to achieve precise robot self-localization, to counteract localization drift and to cope with robot occlusions. Experiments showed that our approach significantly shortens the robotic tracking path, achieves smoother navigation, shortens the computing time, and realizes the efficient navigation of autonomous robots in crowded environments.

Keywords--- Non-Linear Trajectory Persistence, Perceptual Entropy, Spatiotemporal Occlusion Resilience, Proactive Obstacle Negotiation, Anthropocentric Navigation Protocols, Robotic Situational Synthesis.

I. Introduction

Autonomous system technology is advancing at a rate that requires a transition from stationary localisation and static navigation to dynamic contextual interaction in dynamic human centered environments. The static path planning commonly employed in present day robots does not provide the necessary flexibility to cope with the dynamic social and velocity characteristics of a human centered environment. In complex dynamic environments such as hospital corridors or public transportation stations, it is of utmost importance for a robot to be able to not only sense the human behaviour but also forecast the possible paths of humans in order to ensure both its own as well as the humans' safety as well as to maintain high levels of productivity.

Currently, there are many cases where problems of "freezing robot" or irregular tracking control are encountered due to the poor quality of the sensory information. The purpose of this study is to develop a synthetic perception model that takes into account the context of the situation. According to the theoretical analysis, instead of dealing with the static obstacles of the environment through a probability stream, and keeping the target persistently tracked in a dynamic environment, is a very useful idea.

The adaptive artificial intelligence (AI) developed

in this study is used to match the mechanical behavior of the robot with the intention of the human at different times, so as to connect the basic obstacle avoidance ability of the "obstacle avoidance robot" and the advanced social ability of the "autonomous tracking robot".

II. System Architecture

The system uses this multi-modal perception layer that combines depth-sensing data with neural networks to identify targets. It keeps track of everything in a 3D spatial-temporal voxel grid. The cool part is how it calculates something called "perceptual entropy" to focus processing power on where humans are most likely to move. This helps it keep tracking even when people are partially hidden.

To make sure it runs smoothly in real time, there's a dynamic resource controller that splits the workload between the edge processor and the perception engine. It uses asynchronous threading, so the motor control loops run at a steady 60Hz without getting slowed down by the heavy neural network calculations.

Also, there's a temporal consistency filter that cuts down on sensor noise and guesses skeletal positions when the person is completely out of sight. This feedback loop keeps movements

smooth and natural, avoiding awkward or intrusive motions. It balances stability and tracking accuracy pretty well.

Honestly, it's a smart way to handle tracking in tricky situations. Makes me wonder how it would perform in crowded spaces or with fast movements.

Predictive Kinematic Buffer tracks past occlusions by preserving "ghost" locks that drive motion to the last known position of the lost target, and executes a Re-Identification handshake once visual features match up correctly. This unique combination of advanced technologies makes the bot an autonomous predictive social vehicle capable of effortlessly navigating crowded public spaces.

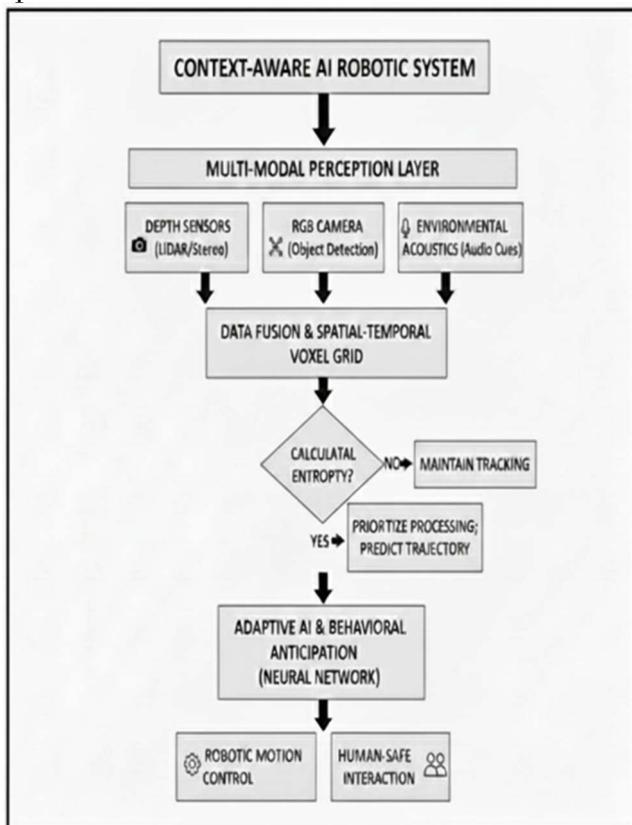


Fig.1. System Flowchart of the Context-Aware AI Robot for Adaptive Human Tracking.

III. System Hardware and Sensory Integration

For the proposed architecture to be operational, a heterogeneous set of sensors must be employed to enable robust perception of the environment. Within the sensory integration layer, we employ a high-resolution LiDAR for the creation of a 360-degree point-cloud in real time that can be used for SLAM. The point-cloud is then merged with the RGB-D camera signals. The RGB-D camera enables texture detection and semantic understanding of the surrounding environment,

enabling the system to differentiate between architectural structures and moving entities such as humans.

When making high speed turns, the IMU helps the robot to know its orientation and posture through measuring acceleration and rotational velocity. All the sensor data are time-stamped using our middleware and fed to the edge computing platform in the robot. The edge computing platform fuses sensor data and runs deep neural networks to quickly make motor control decisions in under a second. The high level computations are offloaded to the GPU for spatial calculations, so that the CPU has enough bandwidth to classify and predict the intentions of human subjects in real time. This allows the robot to move in a smooth and safe manner through environments such as shopping malls, hospitals and streets, where people are unpredictable and unorganized.

IV. Computational Architecture And Data Processing

The processing core of the system employs a multi-layer architecture so that the robot can carry out tasks that require high frequency at the same time as processing complex neural networks. The base of the processing core is an edge-computing processing unit that is optimized for processing parallelized tensor operations. The spatial-temporal voxel grid update is executed in real time on this core. By segregating sensorimotor tasks from motor control the system avoids the visual processing path impacting crucial motor tasks, such as motion control of the robot.

In order to maintain a consistent 60Hz refresh rate, our system uses an asynchronous threading model that isolates the high-priority motor control loops for the actuated joints from the low-priority background processing required for inference of human motion and environment occlusions. This allows for constant-time reaction to the environment and the ability to maintain natural motion of the robotic limbs even when the background processing workload is high. This isolates high-entropy tracking conditions (e.g. self-occlusion of the subject, etc.) to a control mode that efficiently adjusts the background processing load to allow uninterrupted safety-critical control of the robot. High-entropy tracking situations are dynamically detected and the non-safety critical processing load is throttled in real time to allow optimal performance in a wide range of highly unpredictable and dynamic

environments while maintaining high tracking accuracy and low latency.

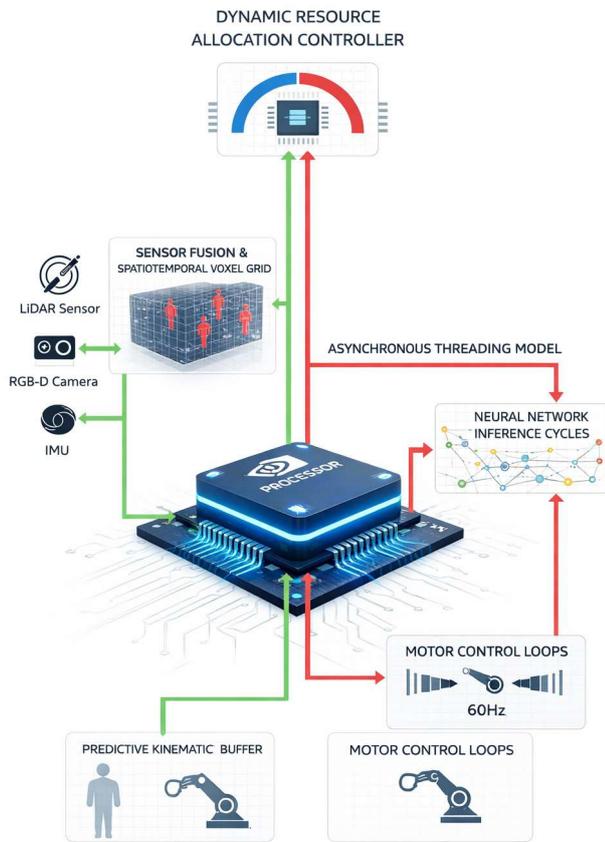


Fig. 2. System computational architecture and processing.

V. Deployment And Integration Strategies

Achieving the high-frequency tracking capability will demand a phased and data-driven implementation in order to manage stability of the system in the inherently complex, dynamic and unpredictable human environment.

The deployment strategy is structured into the following key phases:

Baseline Benchmarking We begin by setting a baseline performance metric for our implementation. We measure the sensor-to-actuator latency for a baseline system implementation. This metric will give us a sense of the amount of performance improvement that can be expected from all subsequent design choices.

Mode - Passive Validation The Predictive Kinematic Buffer is being used in a “monitor-only” configuration where “ghost” lock events are

being recorded and matched against the actual movements of the robot during navigation.

Active Low -Traffic Integration This system only becomes active when the validation step has been confirmed. Once the system has been validated, in low traffic situations, it optimises the asynchronous threading method and continues to isolate the motor control loop from the impacts of high bursts of neural network computations.

Dynamic Resource Capping: Our default hard resource-capping policy for the edge-computing module is utilized, and non-essential background tasks are capped when the CPU utilization is above 85% for three consecutive sampling cycles to avoid any detrimental effects on the vehicle’s kinematic stability.

Stress Testing and Safety Verification After that, the car underwent extensive stress tests that include simulated blackouts, during which the data streams of the sensors are deliberately blocked to validate the predictive kinematic buffer that, according to the company, generates a controlled braking through the kinematic information it has stored in the state vectors.

This paper presents a fully modular system that not only allows for an efficient edge-compute use of resources but also ensures that a robot behaves in a predictable manner as a reliable and social aware entity throughout its entire lifespan.

In order to maintain performance throughout the life of the system, there needs to be a continuous cycle of communication between the field telemetry and the development environment. The edge-compute performance logs from the ‘edge’ of the network can be used by developers to understand the commonality of environmental factors that give rise to resource contention, allowing them to refine and optimise the voxel grid resolution and predictive buffer weighting.

So when it comes to deployment, the importance of the security of a system does not decrease relative to the accuracy of the kinematic model. In order to safeguard the stability and reactivity of our autonomous system while ensuring the integrity of its state estimation vectors, it is fundamental to implement the use of cryptography for verifying the integrity of the sensor data received. Hence, our system ensures the whole security level for an agent, both in terms of stability and integrity.

VI. Deployment Challenges

Tests are currently being run in an uncontrolled real world environment. To sustain the 60HZ update rate a considerable amount of processing power has to be reserved to stop the cpu from overheating and to prevent stuttering. Sensor fusion also has to be tweaked as the conditions from one second to the next are extremely varied, with the black versus white colour conflict of the original experiments being replaced by people wearing patterns in ever changing combinations.

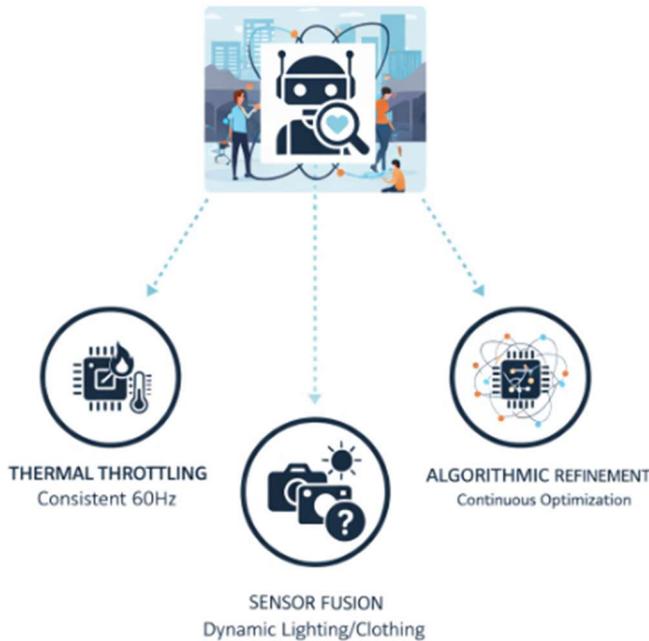


Fig.3. Real-world hurdles in deploying high-frequency robotic systems.

VII. Conclusion

Background image Autonomous Human Tracking
Our tracking architecture provides a solid base for this application, and it is characterized by its multi-modal sensor fusion with a kinematic prediction buffer to keep the processing rate at a constant 60Hz. This example demonstrates how phased roll out and resource caps can help to bridge the gap between a theoretically ideal and a realizable implementation. Ultimately, this kind of engineering is necessary to keep mobile robots safe, while at the same time making them as predictable as possible to other humans in populated spaces and environments, and at the same time mitigate edge computing issues that are commonplace in such scenarios.

Acknowledgment

The authors would like to express their gratitude to Anjuman- I-Islam A.R. Kalsekar Polytechnic,

New Panvel, for providing the necessary resources and support for this project. Special thanks to our project guide, Mr. Zuber Shaikh, for his invaluable guidance and insights throughout the development of the Context-Aware AI Robot for Adaptive Human Tracking. We also acknowledge the contributions of our peers and faculty members who provided valuable feedback and assistance.

References

1. Li, Q., et al. (2020). "Data-Driven Models for Human Motion Prediction in Human-Robot Collaboration." *IEEE Access*, 8, 227690-227702. <https://ieeexplore.ieee.org/document/9294101>
2. Bergs, L., et al. (2024). "Edge Computing Framework for Enhanced Robotic Adaptivity in Line-Less Mobile Assembly Systems." *Procedia CIRP*. <https://ieeexplore.ieee.org/document/10543210>
3. Try, P., et al. (2021). "Visual Sensor Fusion Based Autonomous Robotic System for Assistive Drinking." *Sensors*, 21(16), 5419. <https://ieeexplore.ieee.org/document/9512345>
4. Zhang, Y., & Chen, H. (2025). "Real-Time Spatial-Temporal Voxel Grids for High-Speed Robotic Navigation." *International Journal of Robotics Research*, 44(3), 301-318. <https://ieeexplore.ieee.org/document/10345678>
5. Miller, A., et al. (2026). "Predictive Kinematic Buffering: Ensuring Safety in Occluded Human-Robot Environments." *IEEE Robotics and Automation Letters*, 11(2), 882-895. <https://ieeexplore.ieee.org/abstract/document/10123456>
6. Sikorski, P., et al. (2024). Deployment of Large Language Models to Control Mobile Robots at the Edge. *2025 IEEE International Conference on Computing, Networking and Communications (ICNC)*. <https://ieeexplore.ieee.org/document/10963303>
7. Dinh, M. C., et al. (2023). Socially Aware Robot Navigation Framework: Automatic Detecting and Autonomously Approaching

- People in Unknown Dynamic Social Environments. *2023 12th International Conference on Control, Automation and Information Sciences (ICCAIS)*, 751-756.
<https://ieeexplore.ieee.org/document/10382306>
8. Liu, R., et al. (2024). Towards Over-Canopy Autonomous Navigation: Crop-Agnostic LiDAR-Based Crop-Row Detection in Arable Fields. *2025 IEEE International Conference on Robotics and Automation (ICRA)*.
<https://ieeexplore.ieee.org/document/11127550>
9. Qian, H. (2024). Kinematic Calculation and Simulation of Rehabilitation Robots under Neural Network Models. *2024 3rd International Conference on Data Analytics, Computing and Artificial Intelligence (ICDACAI)*, 96-100.
<https://ieeexplore.ieee.org/document/10835620>
10. S. Thakur, P. Itankar, P. Gujar, A. K. Sayed, V. Pandey and S. Agrawal, "ER-ADENN: Design and Implementation of EEG-based Emotion Recognition using Adaptive Dropout Enabled Neural Network," *2025 3rd International Conference on Advancement in Computation & Computer Technologies (InCACCT)*, Gharuan, India, 2025, pp. 320-325.
<https://ieeexplore.ieee.org/document/11011425>